


TRIPROOF

TRIPROOF40W12-TRI-SS

SAP CODE: 2001067

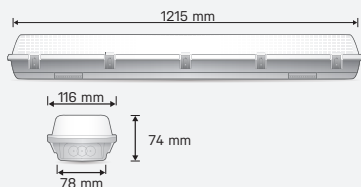


1200mm, 40W,
Intellisensor, Tritone,
indoor/outdoor LED
batten

A robust outdoor/indoor IK08
vandal resistant LED batten
with Intellisensor for automatic
standby dimming and Tritone
switchable colour temperature.

Accessories
SUSPENSION KIT



Photometric
Diagram



Unit: cd
— C0/180 110.0deg
— C90/270 110.0deg

KEY INFORMATION

Lumen Output	4510 / 3830 / 3350lm
Input Power	40W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP65
IK Rating	IK08
IC Rating	N/A
Rebate Scheme Approvals	VEET; REES; IPART LCP 38.82

PHOTOMETRIC

Efficacy	113 / 96 / 84lm/W
LED	SMD
CCT	4000 / 5000 / 6500K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	20-57VDC
Power Factor	>0.9
LED Input Current (nominal)	700mA
Useful life @Ta25° (L70)	50,000hr


CONSTRUCTION

Housing	Polycarbonate
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Bracket
Connection Type	Terminal Block PA14
Total Weight	2kg
Dimensions	1215x116x74mm
Operating Ambient Temp.	-30 to 50°C
Electrical Classification	Class 1
Food Grade Approval	HACCP


Intellisensor

Combine daylight & high frequency motion detection in one unit to achieve on/off control

Detection range, hold time, standby time and daylight threshold can be preset.



Wall Mount



Ceiling Mount

ELECTRICAL

Load Wattage	Max. 500w
Standby Power	<0.5w
Microwave Frequency	5.8Ghz1
Detection Area	<0.2mW
Detection Sensitivity	15mx16m (DxH)
Hold Time	50% / 100%
Standby Time	0s to 30min +
Standby Dimming Level	10% to 50%
Daylight Threshold	50lux / Disable
Dimensions	125x51x44mm
IP Rating	65

Dip Switch Settings

Detection Range	Hold Time	Daylight Sensor	Standby Period	Standby Dimming lever
1	2 3	4	5 6	7 8
<input type="checkbox"/> 100%	<input type="checkbox"/> 5s	<input type="checkbox"/> Disable	<input type="checkbox"/> 0s	<input type="checkbox"/> 10%
<input type="checkbox"/> 50%	<input type="checkbox"/> 1min	<input type="checkbox"/> 50Lux	<input type="checkbox"/> 5min	<input type="checkbox"/> 20%
	<input type="checkbox"/> 10min		<input type="checkbox"/> 30min	<input type="checkbox"/> 30%
	<input type="checkbox"/> 30min		<input type="checkbox"/> +∞	<input type="checkbox"/> 50%

- Note:** 1. "0s" = on/off control
2. "+∞" = bi-level dimming control, fixture never switches off.
3. Factory default setting: 100%, 5s, Disable, 5min, 10%



☐ on *Dip Switch Colour = White