

Interior Lighting / Downlight

DALCO-DA910CTD (4000K)

Features

- Triac dimmable
- CCT selectable: 3000K, 4000K, 5000K
- Polyamide body with latest heat dissipation technology
- Opal acrylic diffuser for even lighting output
- High efficiency SMD LED chips
- CRI ≥ 80 and good stability over lifetime
- With flex and plug
- Quick and simple installation, use spring clip to fix on ceiling
- IC-4 compliant
- IP44 below ceiling, IP40 above



Applications

- Commercial building
- Boutiques
- Restaurants
- Bedrooms
- Offices / Meeting rooms


Standards

- Manufactured under ISO 9001:2015 to standards
- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS 60598.2.2
- IEC/AS/NZS CISPR 15

Mounting Methods



Recessed



Interior Lighting / Downlight


Specifications

Model	DA910CTD
Nominal Power (W)	9
Input Voltage (V)	220-240
Frequency (Hz)	50 / 60
Luminous Flux (lm)	810
Efficacy (lm/W)	90
CRI (Ra)	≥80
Power Factor	>0.90
SDCM	≤5
CCT (K)	3000/4000/5000
Beam Angle (°)	90
Rated Life L70B50 (hr)	30000
Ambient Temp. ta (°C)	-20 to +35
Weight (kg)	0.20


Packaging Details

Model	DA910CTD
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	125 x 120 x 77
Master Carton Qty per box (pc)	48
Master Carton Dimension (mm)	500 x 480 x 270

Lighting Data

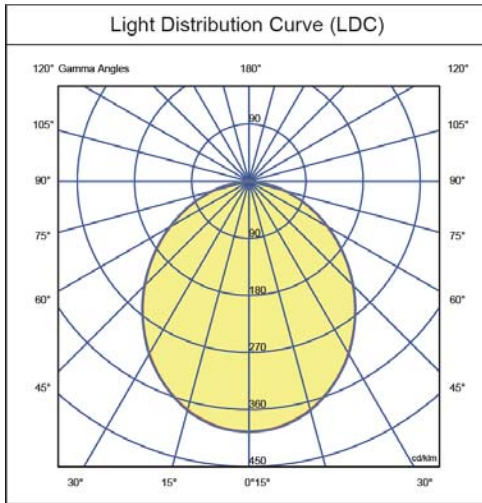

Dimensions

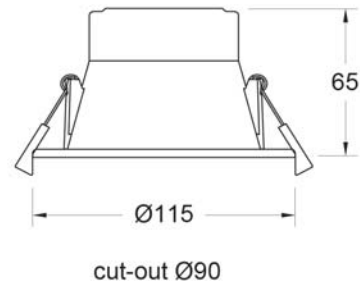

davislighting.com



davislighting.com.au

All photometric and electrical data published are of $\pm 10\%$ tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

Generated on: 24-03-2021
Copyright © 2021 Davis Lighting. All Rights Reserved.